


3/8-24 UNE SET SCREW TO BE INSERTED BELOW FLUSH OF HOLE. SEAL TO BE REMOVABLE SEAL WITH NON SILICONE BASED SEALANT

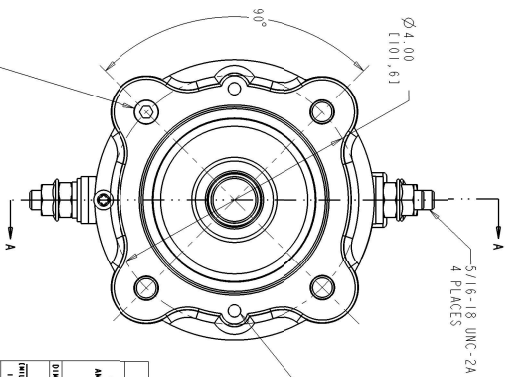

- NOTES:
- VOLTAGE: 24V
 - PERFORMANCE CURVE: CU-3213
 - ROTATION: REVERSIBLE
 - CONNECT "A" TO "F2", "F1" TO POSITIVE BATTERY, "A2" TO GROUND.
 - LEAK TESTED AT 2-3 PSI WITH SHAFT END SEALED.
 - FREE STANDING TORQUE: 50 OZ-IN MAX PER ONE REVOLUTION OF SHAFT.
 - MAX SHAFT END PLAY: .06"
 - FINISH: BLACK POWDER COAT.

REV. NO.		DATE	
6	3/10/2	10-16-12	

REVISIONS		DATE	
6	3/10/2	10-16-12	

PROJECTION THIRD ANGLE

CONTROL CHARACTERISTICS AND DESIGNATOR REFERENCE ENGINEERING SPECIFICATION K-1			
SCALE	1:1	UNIT	INCHES
DATE	10/16/12	BY	0
DESIGNED BY	10/16/12	CHECKED BY	0
DATE	10/16/12	DATE	10/16/12
THIS DRAWING IS THE PROPERTY OF AMTEL, A HUB ELECTRIC DIVISION, AND HAS BEEN ISSUED UNDER A NON-EXCLUSIVE LICENSE TO THE USER. IT IS TO BE RETURNED TO AMTEL AND WILL BE RETURNED FROM REQUEST.			
DIMENSIONS AND DIMENSIONS IN ACCORDANCE WITH ASME Y14.5M-1994 UNLESS DO NOT SCALE DRAWING			
UNLESS OTHERWISE SPECIFIED			
MATERIAL			
NOTED			
MOTOR - REVERSIBLE			

MUX-6302